


MINIATURE TYPE CAM FOLLOWERS

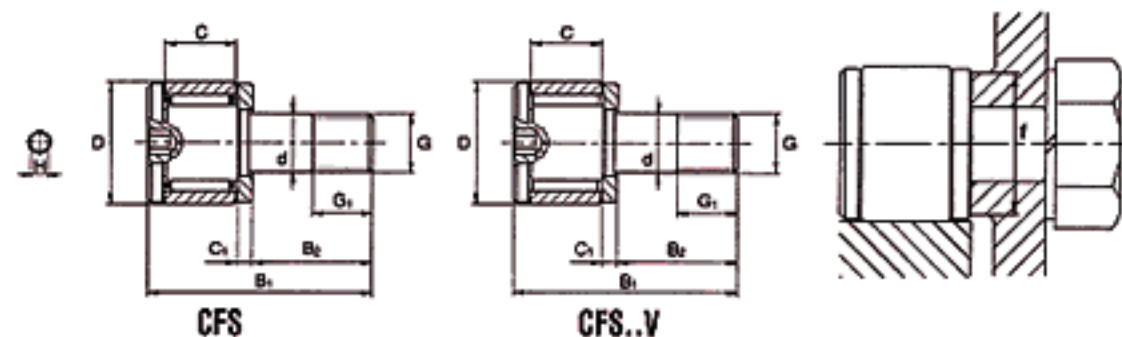

CFS

CFS..V

JNS:CFS TYPE

Stud diameter mm	Thread										Max tightening torque N·m	Basic dynamic load rating Cr N	Basic static load rating Cor N	Largest permissible load N	Limiting speed rpm	Designation		Weight g
	D	C	d	G	G ₁	B ₁	B ₂	C ₁	H	f						With cage	Full roller	
3	6	4	3	M3X0.5	3	11.5	6	0.7	1.5	5.8	0.3	630	610	360	50 000	CFS 3A	—	2
	6	4	3								0.3	1 370	1 770	360	26 000	—	CFS 3 VA	2
4	8	5	4	M4X0.7	4	15	8	1	2	7.7	0.6	1 080	1 080	780	37 000	CFS 4A	—	4
	8	5	4								0.6	2 350	3 040	780	19 000	—	CFS 4 VA	4
5	10	6	5	M5X0.8	5	18	10	1	2.5	9.6	1.3	1 570	1 860	1 420	29 000	CFS 5A	—	7
	10	6	5								1.3	3 140	4 710	1 420	15 000	—	CFS 5 VA	7
6	12	7	6	M6X1	6	21.5	12	1.2	3	11.6	2.3	2 060	2 160	2 110	25 000	CFS 6A	—	13
	12	7	6								2.3	4 610	6 270	2 110	13 000	—	CFS 6 VA	13

1) Smallest permissible chamfer dimension.